


Specification

Wavelength (nm)	625 ± 5
Projection Distance (mm)	110~500
Operating Current (mA)	30
Operating Voltage (DC V)	5 ± 5%
Operating Temperature (°C)	-30 ~ +80
Focusing Mode	Adjustable Mode
Lifetime (h)	100,000 (@RT)
Weight (g)	40
Beam pattern	Composite shape
Source of Light	LED (Red LED Lamp)

◆ Option : Bracket & Power supply.

Beam pattern




Standard distance : 150mm

* Line length by distance

Distance [mm]	Line length [mm]	Line width [mm]
110	7	0.4
150	10	0.5
200	13	0.7
300	20	1.1
400	28	1.6
500	33	1.9

Drawings

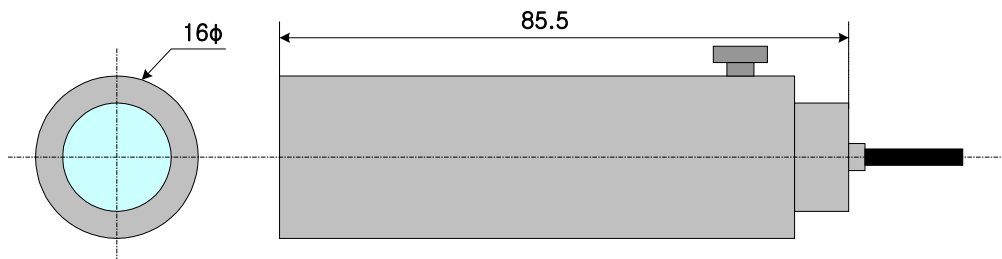

Lanics Co., Ltd.

Room #703, 7F Woolim e-Biz Center
170-5, Guro-dong, Guro-gu, Seoul, 152-050, Korea
TEL : +82-2-2108-2255 FAX : +82-2-2108-2260

E-mail : support@lanics.com

[http:// www.lanics.com](http://www.lanics.com)