

## Features

- ▶ Typical wavelength, 655nm
- ▶ Stabilized optical power 1mW
- ▶ Single supply voltage, 5V DC
- ▶ Collimated laser beam
- ▶ **Modulation : digital, analog ~300KHz**
- ▶ Low power consumption
- ▶ Wire length : 30cm(standard) or custom
- ▶ Laser class : 2 (IEC 60825-1)
- ◆ **Option : Bracket & Power supply.**

## Specification

### Optical

Optical power(mW)	1 (Tc=25°C)
LD power(mW)	5 (Max)
Wavelength(nm)	655 ±5
Focus Beam Dia(mm)	Φ0.15(at 300mm)
Collimated Beam Dia(mm)	3x2(at 10m)
Collimated Beam Div(mrad)	<0.5
Beam Quality	TEM00, M²<1.5
Beam intensity Pattern	Gaussian
LD Pin Connection	Case Ground Case Positive

### Electrical

Operating voltage(DC V)	5 ± 5%
Operating current(mA)	30(Typ.)
Operating Temp.(°C)	-10 ~ +50
Storage Temp.(°C)	-40 ~ +85


### Mechanical

Weight(g)	12 ± 0.5
Dimensions(mm)	Φ12 X 41.5
Operating lifetime(h)	30,000(@RT)
Housing material	Aluminum

## Description

The NA series laser diode module combines laser diode technology, quality optics, and sophisticated electronics within a slim and light aluminum anodized housing for variety of applications. This series of modules provides a elliptical laser beam in a variety of power and wavelength. Applications include a measurement, positioning, lighting, alignment, guidelines, pointing, switching, leveling, and machine vision etc. Useful in a variety of medical, industrial, and scientific instrumentation, as well as general R&D work.

## Drawings

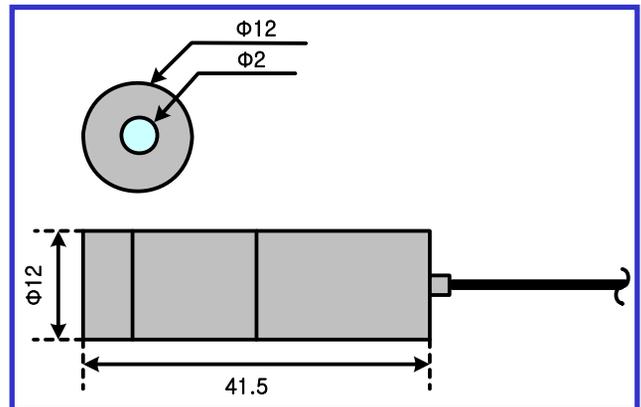

**Lanics Co., Ltd.**

Room #703, 7F Woolim e-Biz Center  
170-5, Guro-dong, Guro-gu, Seoul, 152-050, Korea  
TEL : +82-2-2108-2255 FAX : +82-2-2108-2260

E-mail : [support@lanics.com](mailto:support@lanics.com)  
[http:// www.lanics.com](http://www.lanics.com)